


# EN853 2ST

# EB32

## 2 Steel Wire Braid

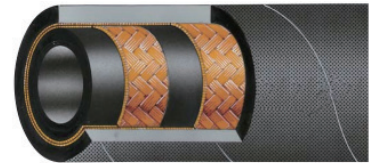

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY AND AGRICULTURE.

TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F





TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
EB32-05	-03	3/16"	4.9	5.4	10.6	11.6	15.1	16.7	415	6018	1660	24070	90	360	50/100
EB32-06	-04	1/4"	6.4	7.0	12.1	13.3	16.7	18.3	400	5800	1600	23200	100	445	50/100
EB32-08	-05	5/16"	7.9	8.5	13.7	14.9	18.3	19.9	350	5075	1400	20300	115	505	50/100
EB32-10	-06	3/8"	9.5	10.1	16.1	17.3	20.6	22.2	330	4785	1320	19140	130	625	50/100
EB32-13	-08	1/2"	12.7	13.5	19.0	20.6	23.8	25.4	275	3988	1100	15950	180	735	50/100
EB32-16	-10	5/8"	15.8	16.7	22.2	23.8	27.0	28.6	250	3625	1000	14500	200	865	50/100
EB32-19	-12	3/4"	18.8	19.8	26.2	27.8	31.0	32.6	215	3118	860	12470	240	1060	50/100
EB32-25	-16	1"	25.4	26.4	34.1	35.7	38.5	40.9	165	2393	660	9570	300	1430	50/100
EB32-32	-20	1 1/4"	31.8	33.0	43.3	45.7	49.2	52.4	125	1813	500	7250	420	2120	20/40
EB32-38	-24	1 1/2"	38.1	39.3	49.6	52.0	55.6	58.8	90	1305	360	5220	500	2380	20/40
EB32-51	-32	2"	50.6	52.0	62.3	64.7	68.2	71.4	80	1160	320	4640	630	3045	20/40

### OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

NORMS	EN853	COLOUR	   
			<p>BLACK      BLUE      RED      GRAY</p>