


SAE100 R13

RS13

4 – 6 Steel Wire Spiral

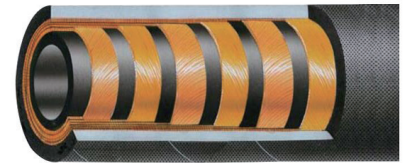

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 4 OR 6 HIGH TENSILE STEEL SPIRAL.

COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR HYDRAULIC SYSTEMS WITH HIGH PEAK PRESSURES AND ARDUOUS OPERATING CONDITIONS.

TEMPERATURE RANGE : -40°C~+120°C / -40°F~+248°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
RS13-19R13	-12	3/4	18.6	19.8	28.2	29.8	31.0	33.2	350	5075	1400	20300	240	2100	20/40
RS13-25R13	-16	1	25.0	26.4	34.9	36.4	37.6	39.8	350	5075	1400	20300	300	2880	20/40
RS13-32R13	-20	1-1/4	31.4	33.0	45.6	48.0	48.3	51.3	350	5075	1400	20300	420	4200	20/40
RS13-38R13	-24	1-1/2	37.7	39.3	53.1	55.5	55.8	58.8	350	5075	1400	20300	500	5000	20/40
RS13-51R13	-32	2	50.4	52.0	66.9	69.3	69.5	72.7	350	5075	1400	20300	640	7000	20/40

OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

NORMS	SAE J517	COLOUR	 BLACK
-------	----------	--------	--