


SAE100 R16

RB16

Compact, 2 Steel Wire Braid

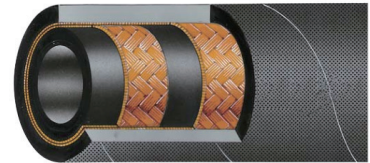

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS USING HYDRAULIC OILS, MINERAL AND VEGETABLE LUBRICANTS.

TEMPERATURE RANGE : -40°C ~ +100°C / -40°F ~ +212°F

TYPE	SIZE		ID (mm)		ROD (mm)	OD (mm)	WP		BP		BR/r	W	L
	Dash Size	inch	min	max	max	max	bar	psi	bar	psi	mm	g/m	max/m
RB16-06R16	-4	1/4	6.2	7.0	12.3	14.5	400	5800	1600	23200	50	300	50/100
RB16-08R16	-5	5/16	7.7	8.5	13.3	15.7	350	5075	1400	20300	55	340	50/100
RB16-10R16	-6	3/8	9.3	10.1	15.9	18.8	330	4785	1320	19140	65	420	50/100
RB16-13R16	-8	1/2	12.3	13.5	19.0	22.0	275	3988	1100	15950	90	540	50/100
RB16-16R16	-10	5/8	15.5	16.7	22.6	25.4	250	3625	1000	14500	100	680	50/100
RB16-19R16	-12	3/4	18.6	19.8	26.3	29.0	215	3118	860	12470	120	800	50/100
RB16-25R16	-16	1	25.0	26.4	34.0	36.6	165	2393	660	9570	150	1150	50/100
RB16-32R16	-20	1-1/4	31.4	33.0	41.9	44.3	125	1813	500	7252	210	1830	20/40

OPTIONS



MSHA

MARKING/TRANSFER TAPE, EMBOSSED OR INK JET

NORMS	SAE J517	COLOUR				
			BLACK	BLUE	RED	GRAY