


YELLOW AIR HOSE

300 PSI

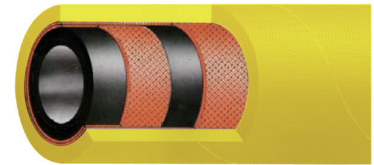

- TUBE : OIL MIST RESISTANT SYNTHETIC RUBBER.
 REINFORCEMENT : MULTIPLE LAYERS OF SPIRAL SYNTHETIC YARN.
 COVER : YELLOW AND ABRASION RESISTANT RUBBER.
 APPLICATION : AIR/WATER HOSE FOR USING IN DEMANDING ENVIRONMENTS SUCH AS MINING, CONSTRUCTION AND INDUSTRIAL APPLICATIONS.
 TEMPERATURE RANGE : -40°C to +100°C (-40°F to +212°F)

TYPE	SIZE	ID (mm)		OD (mm)		WP		BP		W	L
		inch	min	max	min	max	bar	psi	bar	psi	g/m
YA06-3-F-3	1/4"	6.2	7.0	12.7	14.3	20	300	60	900	180	50/100
YA08-3-F-3	5/16"	7.7	8.5	14.7	16.3	20	300	60	900	260	50/100
YA10-3-F-3	3/8"	9.3	10.1	16.7	18.3	20	300	60	900	310	50/100
YA12-3-F-3	1/2"	12.6	13.8	21.8	23.8	20	300	60	900	460	50/100
YA16-3-F-3	5/8"	15.6	16.8	24.4	26.4	20	300	60	900	510	50/100
YA19-3-F-3	3/4"	18.6	19.8	28.8	30.8	20	300	60	900	660	50/100
YA25-3-F-3	1"	24.6	25.2	36.5	38.5	20	300	60	900	810	50/100
YA32-3-F-3	1-1/4"	31.8	32.4	42.8	45.2	20	300	60	900	1090	50/100
YA38-3-F-3	1-1/2"	37.8	38.4	50.8	53.2	20	300	60	900	1470	50/100
YA51-3-F-3	2"	50.8	51.4	63.8	66.2	20	300	60	900	2060	50/100
YA63-3-F-3	2-1/2"	63.8	65	74.9	77.9	20	300	60	900	2000	50/100
YA76-3-F-3	3"	75.9	77.1	91.5	94.5	20	300	60	900	2450	50/100
YA89-3-F-3	3-1/2"	88.9	90.1	104.5	107.5	20	300	60	900	3560	50/100
YA102-3-F-3	4"	101.8	103	117.5	120.5	20	300	60	900	3840	50/100

OPTIONS



EPDM COVER

MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

		COLOUR	 YELLOW
--	--	--------	---